




Temple	Polycarbonate with PVC soft tip
Frame	Polycarbonate
Lens	Polycarbonate
Lens thickness	2.4 mm
Weight	26 g
Features	<ul style="list-style-type: none"> - Impact protection - Impact protection at extreme temperature - Hard coated lens - Anti-slip nosepad - Wraparound with side protection

Reference	Lens Colour	Frame Colour	Frame Marking	Lens Marking	Lens Norms
 6PSI0	Clear	Black	SFT	2-1.2 1 SFTK	EN 170
 6PSI3	Smoke	Black	SFT	5-3.1 1 SFTK	EN 172

Packaging & Storing

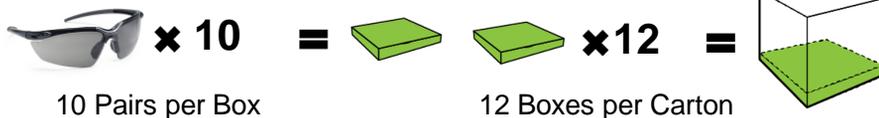

Always transport and store in the original packaging. Store in a dry place, away from direct sunbeam.

120 Pairs in 1 Carton

Product Standards


This article is in conformity with the model of individual safety equipment which correspond to

**The CE Type-examination certificate n° 8126 Issue 2
Delivered by SATRA (notified body n° 0321)**



This model is in conformity with the standard **EN 166:2001**

General Norms & Explanation

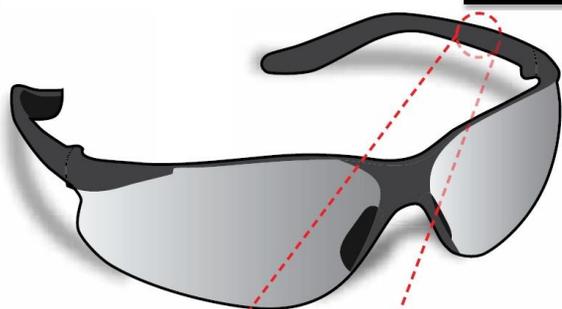

LU Q EN166 F CE 0070

- 1
- 2
- 3
- 4
- 5

1. Manufacturer
2. Standard
3. Mechanical Resistance
4. Certification
5. Notified body



- i. Code N°
- ii. Protection class
- iii. Manufacturer
- iv. Optical Class
- v. Mechanical Resistance Certification Marking

EN 166

Specification (optical quality, resistance to usual and mechanical risks and to impacts)

EN 169

Welding Filters

EN 170

Ultraviolet filters

EN 172

Sun glare filters for industrial use

EN 175

Welding equipment

EN 379

Welding filters with variable shade or dual shade

EN 1731

Mesh face shield

EN 12312-1

Sunglasses and related eyewear : Sunglasses for general use (CAT. 0 – 4, Lens of CAT. 4 are not suitable for traffic driving)

Temperature between -5° (± 2°) & 55° (± 2°)

T

Hard coated lens

K

Anti-fog coated lens

N

Protection against liquids

3

Enhanced solidity

S

Protection against big dusts

4